


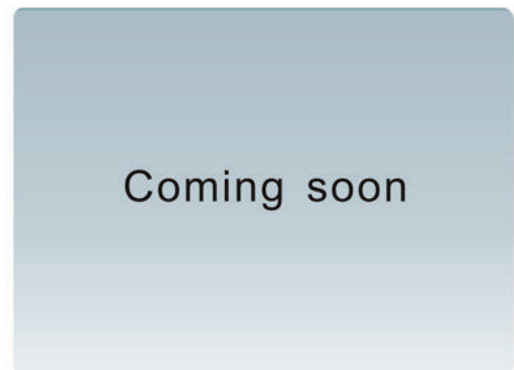


	A	B
CS-239 (5")	138	205
CS-249 (6")	170	245

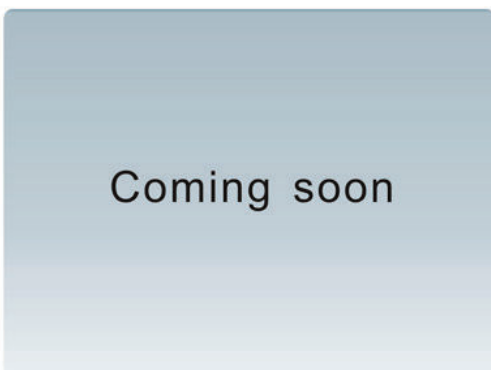

	A	B	C
CS-229 (5")	138	205	130
CS-228 (6")	170	252	184



	A	B	C
CS-219 (5")	138	205	130
CS-218 (6")	170	252	184



Model	CS-239	CS-249	CS-229	CS-228	CS-219	CS-218
Max power	10W	20W	10W	20W	10W	20W
Line voltage	100V	100V	100V	100V	100V	100V
Sensitivity (1m, 1W)	91±3dB	92±3dB	91±3dB	92±3dB	91±3dB	92±3dB
Frequency response	130~15kHz	110~15kHz	130~15kHz	110~15kHz	130~15kHz	110~15kHz
Dimension (mm)	Φ138*205	Φ170*245	Φ138*205	Φ170*252	Φ138*205	Φ170*252
Material	ABS	ABS	Aluminum	Aluminum	Aluminum	Aluminum
Weight (kg)	1.6	1.6	2.9	3.4	2.2	2.8
Speaker unit	5"	6"	2*5"	2*6"	5"	6"