

Section

Public Address

Category

Wall-mounting speakers / C1000-TW range

Code

C1200-TW



Description

**200W IP55 2-way speaker unit**

C1000-TW is a complete range of very high performance full range and horn leaded loudspeakers, designed to provide high quality music and voice reproduction in applications with extreme weather conditions resistance, ensuring a long term exposure to all kind of severe environment conditions.


High quality voice reproduction and music performance, normally associated only with indoor systems, are now available for outdoor use, with this brand new series of speaker cabinets. The all Italian Style and the severe construction methods make all loudspeakers suitable for any indoor environment as well.

The **C1200-TW** is suitable for convention centers, athletic fields or stadiums, theme parks, swimming pools, cruise ships, malls, ballrooms and in general for outdoor background music and paging systems. C1000-TW brand new all-weather speaker range will provide long term reliability for temporary and permanent outdoor installations, as these speaker systems are manufactured applying the most severe standard expected from a classification of International Protection Rating IP 55.

**Main features**

- 12" coaxial woofer with 2.5" coil and 1" HF driver with 1.7" coil on conical 90° horn.
- 100V line transformer with selectable 200W/100W power tapping.
- Sturdy molded polyethylene curved enclosure.
- Staffa a U in acciaio inclusa.
- 4 wires cable to select the desired power tapping.
- Water-stop grill with 3 layers of protection
- IP55 weather resistant
- Standard grey finish RAL 7011.

Technical data

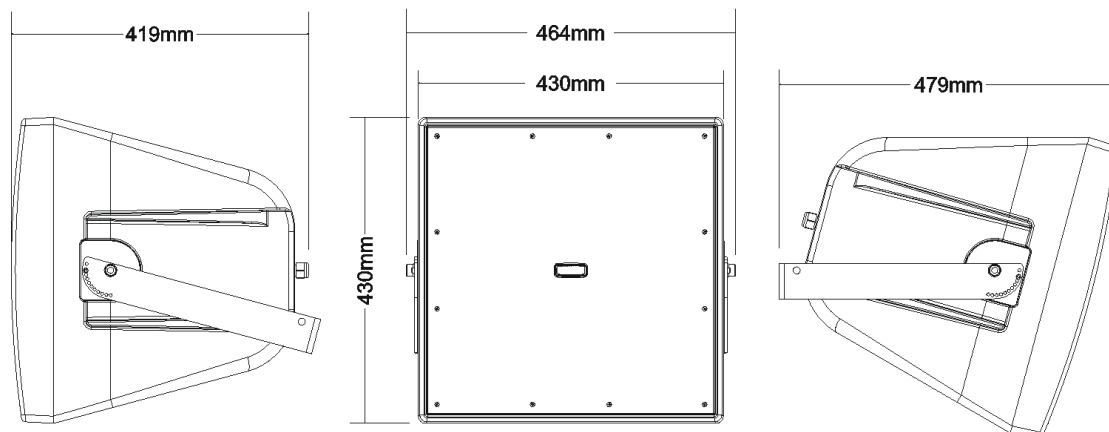

### Technical data

C1200-TW	
Rated power	200 W
Configuration	2-way
Line transformer (100V)	200 W / 100 W
Rated impedance	8 Ω
Frequency response @ -6dB	70 ÷ 20.000 Hz
Efficiency @ 1W/1m	98 dB
Maximum SPL cont/peak	124 / 128 dB
Dispersion angle	90° cone
Recommended HP filter	50 Hz / 24 dBoct
Input connectors	4-wire cable
Colour	Grey RAL 7011
Protection degrees	IP55
Dimensions	430 x 430 x 400 mm
Net weight	15 kg

