

CS-6A /CS-30A/30R

CS-6A


Cylindrical body in shock-resistant ABS plastic.
One wide range Φ 12cm speaker built-in case and is possible to select the output power from 3 more different values. with 50V, 70V, 100V, line input.



CS-6A/CS-30R (IP66)


CS-30A / 30R

The body in shock-resistant ABS plastic.
One wide range high efficient Φ 12cm speaker built-in case. Includes line transformer for constant voltage systems. It is possible to select the output power from 3 more different values. CS-30A/ 30R with 50V, 70V, 100V line input.

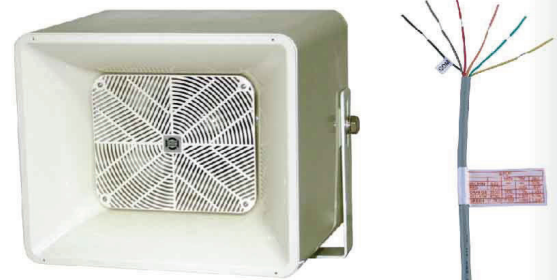


CS-30A (IP66)

CS-6A

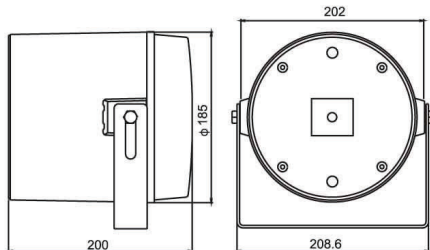

CS-30A

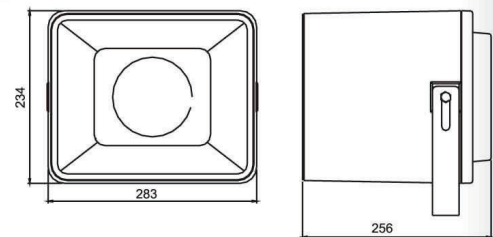

Unit: mm

The above 3 speaker units (CS-6A/30A/30R) are weatherproof.
However, please do not install them in locations where they can be exposed to direct rain.

MODEL	CS-6A	CS-30A / 30R
Input Power (RMS)	6W (50, 70, 100V line)	30W (50, 70, 100V line)
Input Impedance	420 Ω (50V line only) 830 Ω (50V, 70V line only) 1.65K Ω , 3.3K Ω , 6.7K Ω	83 Ω (50V line only) 165 Ω (50V, 70V line only) 1.3K Ω , 330 Ω , 670 Ω
Preset Impedance	1.65K Ω	330 Ω
Frequency Response	150~15KHz	125~15KHz
Built-in Speaker	Φ 12cm speaker	Φ 12cm speaker
Output Power Level	1.5, 3, 6W 95dB (1W/ M)	7.5, 15, 30W 101dB (1W/ M)
Weight (Approx.)	1.4 kg (3.091b)	3.7kg (8.16 lb)/ 2.1kg (4.63 lb)